

80 Floor Finish & Sealer

Metal-free combination floor finish and sealer formulated for high performance.


Coastwide Professional™ 80 Floor Finish & Sealer is a high performance product designed for high speed and low-maintenance floor care programs. This durable, high-gloss floor finish contains no zinc or heavy metals.

Features

- High durability, outstanding gloss retention and superior detergent resistance
- Formulated with self cross-linking no-metal technology
- Eco preferable* and free from alkyl phenol ethoxylate (APE), formaldehyde, phthalate and metals
- Outstanding performance reduces the labor costs associated with burnishing, recoating and stripping
- Ultra-low-odor characteristics make it ideal for floor care in schools, hospitals and patient care facilities
- Seals and finishes in one easy step
- Rapid leveling and film formation
- Balances outstanding sealer adhesion with unsurpassed finish durability
- Use with or without burnishing
- Exhibits outstanding black heel mark and scuff mark resistance
- Meets industry guidelines for slip resistance
- Excellent soil resistance reduces deep scrubbing and stripping
- Outstanding clarity and brightness
- One gallon covers 2,500–3,000 square feet
- Universally compatible with most sealers and finishes
- Meets Green Seal™ GS-40 performance requirements

*Compared to conventional cleaning products.


Directions

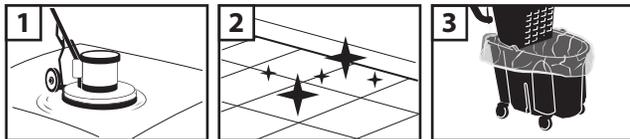

Strip floors with Coastwide 82 / 83 or top scrub with Coastwide 64.

Ensure floor is clean and dry before application.

Line mop bucket with trash bag to avoid contamination.

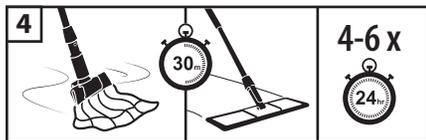


With clean Rayon mop / microfiber flat mop apply 4-6 coats over 24 hours (30 minutes between coats). Only use in a well-ventilated area.


Use On:




VCT/LVT



Terrazzo



Concrete floors



Other resilient flooring

Maintenance Procedures:

Frequently dust mop, clean daily with Coastwide 64 or 50, buff/burnish as needed.

COASTWIDE

PROFESSIONAL™

Attributes

Physical form:	Opaque, white liquid
Odor:	Characteristic
Non-volatile solids:	20% minimum
pH (as is):	7.5-8.5
Film color:	Clear and colorless
Coverage:	2,500-3,000 square feet per gallon (min.)
Slip resistance:	Meets ASTM D2047
Shelf life:	2 years minimum in unopened container

These specifications were correct at the time of printing but are subject to change without notice.

1 Gallon
CW080RU01-A



1 gallon, 4 units/case

5 Gallon
CW080RU05-A



5 gallons/ each



This product meets Green Seal™ Standard GS-40 based on effective performance and protective limits on VOCs and human & environmental toxicity. Learn more at GreenSeal.org.



All plastic containers used in packaging products display the Society of Plastics Industries' 3-side triangular arrow to make recycling easier. The majority of our containers are readily recyclable and classified as 2-HDPE (High-Density Polyethylene) and some contain 25% post-consumer recycled plastic.

To Purchase visit coastwideprofessional.com or contact your sales rep.