



中国认可
检测
TESTING
CNAS L0748



NO.1123010077

检测报告

Test Report

样品名称： 锂离子圆柱形可充电电池组 CH700-2S1P 7.2V 1900mAh
13.68Wh

Name of Sample: Li-ion Cylindrical Rechargeable Battery Pack
CH700-2S1P 7.2V 1900mAh 13.68Wh

委托单位： 东莞市朗科新能源科技有限公司

Consignor: Dongguan Longood New Energy Technology Co., Ltd.



上海化工院检测有限公司

Shanghai Institute of Chemical Industry Testing Co., Ltd.

声 明

Statement

1. 检测报告无本实验室公章（或检验检测专用章）无效。
The test report is invalid if it is not affixed the official seal of the laboratory to it.
2. 复制检测报告未重新加盖本实验室公章（或检验检测专用章）无效。
Copies of the test report without the official seal of the laboratory are invalid.
3. 检测报告无编制、审核、批准人签字无效。
The test report is invalid without the signatures of compiler, checker and approver.
4. 检测报告涂改无效。
The test report is invalid if it is blotted out.
5. 未经本实验室书面批准，不得部分复制检测报告。
It is forbidden to copy the test report partially without the written approval of the laboratory.
6. 送样委托检测结果，仅对所送样品有效。
The conclusion of the consignment test is only valid for the provided sample.
7. 本检测报告以中文为准，英文文本（如有）仅为译文，两者发生冲突时，应以中文文本为准。
The test report has been drafted in Chinese and translated into English (if exist) for convenience only. In the event of discrepancy, the Chinese version shall prevail.
8. 除另有说明，检测检验类别都是指委托分析。
Unless noted otherwise, the test type is consignment test.

地址：上海市云岭东路 345 号

Address: No.345 East Yunling Road, Shanghai

邮政编码(Post Code): 200062

电话(Tel): (021) 31765555

传真(Fax): (021) 31015117

网址 (web site): www.ghs.cn

电子信箱 (E-mail): center@ghs.cn

上海化工院检测有限公司
检测报告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1123010077

1/11

样品名称 Name of Sample	中文 Chinese	锂离子圆柱形可充电电池组 CH700-2S1P 7.2V 1900mAh 13.68Wh	
	英文 English	Li-ion Cylindrical Rechargeable Battery Pack CH700-2S1P 7.2V 1900mAh 13.68Wh	
样品编号 Sample No.	1123010077		
委托单位 Consignor	东莞市朗科新能源科技有限公司 Dongguan Longood New Energy Technology Co., Ltd.		
生产单位 Manufacturer	东莞市朗科新能源科技有限公司 Dongguan Longood New Energy Technology Co., Ltd.		
检测方法 Test method	联合国《试验和标准手册》 ST/SG/AC.10/11/Rev.7 38.3 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3		
判定标准 Criterion	联合国《试验和标准手册》 ST/SG/AC.10/11/Rev.7 38.3 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3		
样品外观 Appearance	蓝色 塑料薄膜外壳 Blue Plastic film shell		
样品接受日期 Accepted Date	2023-01-03	检测起迄日期 Test Date	2023-01-16 ~ 2023-02-21
检测项目 Test Items	高度模拟;热测试;振动;冲击;外短路;撞击;过充电;强制放电 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Impact, Overcharge, Forced discharge		
检测结论 Conclusion	经检测, 该样品符合联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3标准要求。 The sample has passed the test items of UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 生效日期(Date): 2023-02-22		
备注 Comment	可充电锂电池组Rechargeable Lithium Battery. /		
委托单位地址 Consignor Address	/	邮政编码 Post Code	518109



批准
Approver:
职务
Title:

许莹

审核
Checker:

陆建峰

编制
Compiler:

傅佳

电化学测试部部长 (Head of Electrochemical Testing Department)



上海化工院检测有限公司
检测报告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1123010077

2/11

序号 No.	检测项目名称 Name of Test Items	标准要求或标准条款号 Standard requirement or The Clause Number of Standard	检测结果 Test Result	本项结论 Conclusion	备注 Remark	
1	高度模拟 Altitude simulation	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.1 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.1	见附表 1 See Appendix 1	合格 Passed	/	
2	热测试 Thermal test	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.2 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.2	见附表 2 See Appendix 2	合格 Passed	/	
3	振动 Vibration	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.3 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.3	见附表 3 See Appendix 3	合格 Passed	/	
4	冲击 Shock	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.4 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.4	见附表 4 See Appendix 4	合格 Passed	/	
5	外短路 External short circuit	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.5 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.5	见附表 5 See Appendix 5	合格 Passed	/	
6	撞击 Impact	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.6 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.6	见附表 6 See Appendix 6	合格 Passed	/	
7	过充电 Overcharge	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.7 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.7	见附表 7 See Appendix 7	合格 Passed	/	
8	强制放电 Forced discharge	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.7 38.3 试验T.8 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 Section 38.3 Test T.8	见附表 8 See Appendix 8	合格 Passed	/	
检测环境条件 Test Environment Condition		环境温度:20℃-21℃;环境湿度:/% Ambient temperature:20℃-21℃;Ambient humidity:/%				
分包检验情况 Subcontracted Test Condition		检测项目 Test Item	/			
		分包实验室 Subcontracted Laboratory	名称 Name	/	邮编 Post Code	/
			地址 Address	/	电话 Tel	/

上海化工院检测有限公司 检测报告-附表1

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report—Appendix 1

NO. 1123010077

3/11

序号 No.	1	检测项目名称 Name of Test Items	高度模拟 Altitude simulation					
样品 编号 Sample No.	样品状态 Sample Status	试验前 Before		试验后 After		质量损失 Mass Loss /%	剩余电压 Residual OCV /%	其他 现象 Other Event
		质量 Mass /g	开路电压 OCV /V	质量 Mass /g	开路电压 OCV /V			
001	1CYC完全充电 1CYC Fully charged	96.1747	8.30	96.1733	8.30	0.00	100.00	O
002	1CYC完全充电 1CYC Fully charged	96.1695	8.30	96.1673	8.29	0.00	99.88	O
003	1CYC完全充电 1CYC Fully charged	96.1484	8.30	96.1458	8.29	0.00	99.88	O
004	1CYC完全充电 1CYC Fully charged	96.2537	8.30	96.2514	8.29	0.00	99.88	O
005	25CYC完全充电 25CYC Fully charged	98.7706	8.38	98.7693	8.38	0.00	100.00	O
006	25CYC完全充电 25CYC Fully charged	98.7653	8.36	98.7598	8.36	0.01	100.00	O
007	25CYC完全充电 25CYC Fully charged	98.7982	8.38	98.7960	8.38	0.00	100.00	O
008	25CYC完全充电 25CYC Fully charged	98.7070	8.36	98.7096	8.35	0.00	99.88	O
以下空白	This space intentionally left blank							
备注: L-泄漏 V-漏气 D-解体 R-破裂 F-起火 O-无泄漏、无漏气、无解体、无破裂、无起火。 Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage, No Venting, No Disassembly, No Rupture & No Fire.								

上海化工院检测有限公司
检测报告-附表2
Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report—Appendix 2

NO. 1123010077

4/11

序号 No.	2	检测项目名称 Name of Test Items		热测试 Thermal test				
样品 编号 Sample No.	样品状态 Sample Status	试验前 Before		试验后 After		质量损失 Mass Loss /%	剩余电压 Residual OCV /%	其他 现象 Other Event
		质量 Mass /g	开路电压 OCV /V	质量 Mass /g	开路电压 OCV /V			
001	1CYC完全充电 1CYC Fully charged	96.1733	8.30	96.1486	8.17	0.03	98.43	O
002	1CYC完全充电 1CYC Fully charged	96.1673	8.29	96.1418	8.16	0.03	98.43	O
003	1CYC完全充电 1CYC Fully charged	96.1458	8.29	96.1211	8.17	0.03	98.55	O
004	1CYC完全充电 1CYC Fully charged	96.2514	8.29	96.2269	8.16	0.03	98.43	O
005	25CYC完全充电 25CYC Fully charged	98.7693	8.38	98.7215	8.18	0.05	97.61	O
006	25CYC完全充电 25CYC Fully charged	98.7598	8.36	98.7169	8.18	0.04	97.85	O
007	25CYC完全充电 25CYC Fully charged	98.7960	8.38	98.7583	8.17	0.04	97.49	O
008	25CYC完全充电 25CYC Fully charged	98.7096	8.35	98.6827	8.22	0.03	98.44	O
以下空白	This space intentionally left blank							
备注: L-泄漏 V-漏气 D-解体 R-破裂 F-起火 O-无泄漏、无漏气、无解体、无破裂、无起火。 Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage,No Venting, No Disassembly,No Rupture & No Fire.								

上海化工院检测有限公司
检测报告-附表3

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report—Appendix 3

NO. 1123010077

5/11

序号 No.	3	检测项目名称 Name of Test Items		振动 Vibration				
样品 编号 Sample No.	样品状态 Sample Status	试验前 Before		试验后 After		质量损失 Mass Loss /%	剩余电压 Residual OCV /%	其他 现象 Other Event
		质量 Mass /g	开路电压 OCV /V	质量 Mass /g	开路电压 OCV /V			
001	1CYC完全充电 1CYC Fully charged	96.1486	8.17	96.1830	8.16	0.00	99.88	O
002	1CYC完全充电 1CYC Fully charged	96.1418	8.16	96.1770	8.15	0.00	99.88	O
003	1CYC完全充电 1CYC Fully charged	96.1211	8.17	96.1561	8.16	0.00	99.88	O
004	1CYC完全充电 1CYC Fully charged	96.2269	8.16	96.2603	8.14	0.00	99.75	O
005	25CYC完全充电 25CYC Fully charged	98.7215	8.18	98.7663	8.16	0.00	99.76	O
006	25CYC完全充电 25CYC Fully charged	98.7169	8.18	98.7609	8.17	0.00	99.88	O
007	25CYC完全充电 25CYC Fully charged	98.7583	8.17	98.8027	8.16	0.00	99.88	O
008	25CYC完全充电 25CYC Fully charged	98.6827	8.22	98.7270	8.22	0.00	100.00	O
以下空白	This space intentionally left blank							
备注: L-泄漏 V-漏气 D-解体 R-破裂 F-起火 O-无泄漏、无漏气、无解体、无破裂、无起火。 Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage,No Venting, No Disassembly,No Rupture & No Fire.								

上海化工院检测有限公司
检测报告-附表4
Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report — Appendix 4

NO. 1123010077

6/11

序号 No.	4	检测项目名称 Name of Test Items		冲击 Shock				
样品 编号 Sample No.	样品状态 Sample Status	试验前 Before		试验后 After		质量损失 Mass Loss /%	剩余电压 Residual OCV /%	其他 现象 Other Event
		质量 Mass /g	开路电压 OCV /V	质量 Mass /g	开路电压 OCV /V			
001	1CYC完全充电 1CYC Fully charged	96.1830	8.16	96.1825	8.16	0.00	100.00	0
002	1CYC完全充电 1CYC Fully charged	96.1770	8.15	96.1766	8.15	0.00	100.00	0
003	1CYC完全充电 1CYC Fully charged	96.1561	8.16	96.1557	8.16	0.00	100.00	0
004	1CYC完全充电 1CYC Fully charged	96.2603	8.14	96.2598	8.13	0.00	99.88	0
005	25CYC完全充电 25CYC Fully charged	98.7663	8.16	98.7660	8.16	0.00	100.00	0
006	25CYC完全充电 25CYC Fully charged	98.7609	8.17	98.7604	8.16	0.00	99.88	0
007	25CYC完全充电 25CYC Fully charged	98.8027	8.16	98.8023	8.16	0.00	100.00	0
008	25CYC完全充电 25CYC Fully charged	98.7270	8.22	98.7264	8.22	0.00	100.00	0
以下空白	This space intentionally left blank							

备注：L-泄漏 V-漏气 D-解体 R-破裂 F-起火 0-无泄漏、无漏气、无解体、无破裂、无起火。
Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage, No Venting,
No Disassembly, No Rupture & No Fire.

上海化工院检测有限公司
 检测报告-附表5
 Shanghai Institute of Chemical Industry
 Testing Co., Ltd. Test Report — Appendix 5

NO. 1123010077

7/11

序号 No.	5	检测项目名称 Name of Test Items	外短路 External short circuit
样品编号 Sample No.	样品状态 Sample Status	样品表面最高温度 Max. External Temperature /℃	其他现象 Other Event
001	1CYC完全充电 1CYC Fully charged	56.5	O
002	1CYC完全充电 1CYC Fully charged	56.2	O
003	1CYC完全充电 1CYC Fully charged	56.6	O
004	1CYC完全充电 1CYC Fully charged	57.3	O
005	25CYC完全充电 25CYC Fully charged	56.4	O
006	25CYC完全充电 25CYC Fully charged	57.3	O
007	25CYC完全充电 25CYC Fully charged	57.2	O
008	25CYC完全充电 25CYC Fully charged	56.7	O
以下空白	This space intentionally left blank		
备注：D-解体 R-破裂 F-起火 O-无解体、无起火、无破裂。 Note: D-Disassembly R-Ruptur F-Fire O-No Disassembly,No Fire & No Rupture.			

上海化工院检测有限公司
 检测报告-附表6
 Shanghai Institute of Chemical Industry
 Testing Co., Ltd. Test Report—Appendix 6

NO. 1123010077

8/11

序号 No.	6	检测项目名称 Name of Test Items	撞击 Impact
样品编号 Sample No.	样品状态 Sample Status	样品表面最高温度 Max. External Temperature /℃	其他现象 Other Event
009	1CYC 50%容量 1CYC 50% Capacity	77.0	O
010	1CYC 50%容量 1CYC 50% Capacity	40.6	O
011	1CYC 50%容量 1CYC 50% Capacity	104.0	O
012	1CYC 50%容量 1CYC 50% Capacity	113.0	O
013	1CYC 50%容量 1CYC 50% Capacity	22.5	O
014	25CYC 50%容量 25CYC 50% Capacity	22.6	O
015	25CYC 50%容量 25CYC 50% Capacity	20.2	O
016	25CYC 50%容量 25CYC 50% Capacity	119.5	O
017	25CYC 50%容量 25CYC 50% Capacity	24.7	O
018	25CYC 50%容量 25CYC 50% Capacity	24.1	O
以下空白	This space intentionally left blank		
备注：D-解体 F-起火 O-无解体、无起火。 Note: D-Disassembly F-Fire O-No Disassembly & No Fire.			

上海化工院检测有限公司
 检 测 报 告 - 附表7
 Shanghai Institute of Chemical Industry
 Testing Co., Ltd. Test Report — Appendix 7

NO. 1123010077

9/11


序号 No.	7	检测项目名称 Name of Test Items	过充电 Overcharge
样品编号 Sample No.	样品状态 Sample Status	其他现象 Other Event	
019	1CYC完全充电 1CYC Fully charged		O
020	1CYC完全充电 1CYC Fully charged		O
021	1CYC完全充电 1CYC Fully charged		O
022	1CYC完全充电 1CYC Fully charged		O
023	25CYC完全充电 25CYC Fully charged		O
024	25CYC完全充电 25CYC Fully charged		O
025	25CYC完全充电 25CYC Fully charged		O
026	25CYC完全充电 25CYC Fully charged		O
以下空白	This space intentionally left blank		
备注: D-解体 F-起火 O-无解体、无起火。 Note: D-Disassembly F-Fire O-No Disassembly & No Fire.			

上海化工院检测有限公司
 检测报告-附表8
 Shanghai Institute of Chemical Industry
 Testing Co., Ltd. Test Report — Appendix 8

NO. 1123010077

10/11

序号 No.	8	检测项目名称 Name of Test Items	强制放电 Forced discharge
样品编号 Sample No.	样品状态 Sample Status	其他现象 Other Event	
027	1CYC完全放电 1CYC Fully discharged		O
028	1CYC完全放电 1CYC Fully discharged		O
029	1CYC完全放电 1CYC Fully discharged		O
030	1CYC完全放电 1CYC Fully discharged		O
031	1CYC完全放电 1CYC Fully discharged		O
032	1CYC完全放电 1CYC Fully discharged		O
033	1CYC完全放电 1CYC Fully discharged		O
034	1CYC完全放电 1CYC Fully discharged		O
035	1CYC完全放电 1CYC Fully discharged		O
036	1CYC完全放电 1CYC Fully discharged		O
037	25CYC完全放电 25CYC Fully discharged		O
038	25CYC完全放电 25CYC Fully discharged		O
039	25CYC完全放电 25CYC Fully discharged		O
040	25CYC完全放电 25CYC Fully discharged		O
041	25CYC完全放电 25CYC Fully discharged		O
042	25CYC完全放电 25CYC Fully discharged		O
043	25CYC完全放电 25CYC Fully discharged		O
044	25CYC完全放电 25CYC Fully discharged		O
045	25CYC完全放电 25CYC Fully discharged		O
046	25CYC完全放电 25CYC Fully discharged		O
备注: D-解体 F-起火 O-无解体、无起火。 Note: D-Disassembly F-Fire O-No Disassembly & No Fire.			

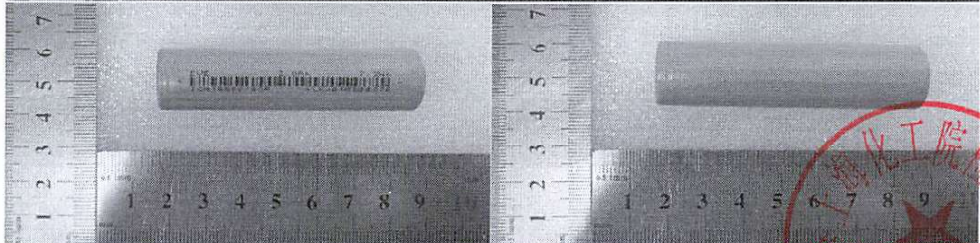


Shark NINJA White wire (NTC) Yellow wire (B1)
 Black wire (-) Red wire (+)

Type: Li-ion Cylindrical Rechargeable Battery Pack
 Date: YR16 2INR19/66
 Model: CH700-2S1P
 Typical Capacity: 2000mAh
 Rated Capacity: 1900mAh 7.2V 13.68Wh
 Manufacturer: DONGGUAN LONGOOD
 NEW ENERGY TECHNOLOGY CO.,LTD.
 Passed UN38.3 test XXXXXXXX

CE Li-ion RECYCLE RBRG 1800.798.7398

Y16RL3010001 MADE IN CHINA

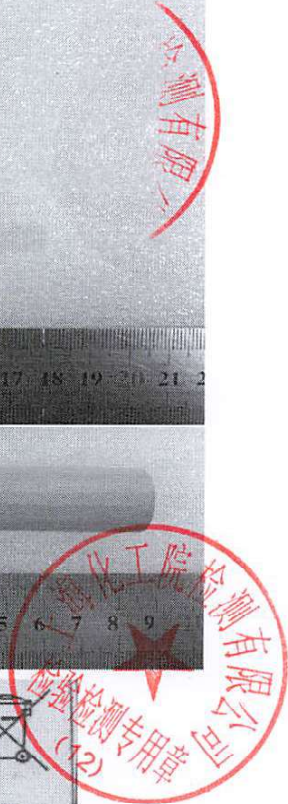

报告结束